INSTANT AIR 3000

WIND MACHINE WITH VARIABLE FAN SPEED
AND WIND DIRECTION



FEATURES

- Powerful wind machine
- Maximum air flow rate of 77 m³ per minute
- Suitable for the use with fog-, snow- and bubble-machines
- Fan speed adjustable in 1% steps from 1 to 100
- Continuously variable directional adjustment of the air flow
- DMX control or stand-alone operation
- Remote control included
- Floor installation and suspension on trusses

DESCRIPTION

The Cameo Instant Air 3000 wind machine offers professional performance and maximum flexibility for impressive wind effects at any type of event. With a powerful air flow rate of 77 m³ per minute, it can be used in a variety of ways – from gentle breezes to powerful gusts of wind. Effects can be precisely adapted to your needs thanks to the finely tunable fan speed in 1 per cent increments and the infinitely adjustable airflow direction.

Whether in DMX mode or as a stand-alone device, control is simple and convenient, either via the integrated radio remote control or via DMX signal. With three-pin and five-pin DMX connections and an easy-to-read LED display, the Cameo Instant Air 3000 offers modern interfaces and intuitive operation. Particularly noteworthy is the extremely quiet operation of the 31 cm fan, which allows the wind machine to work almost silently.

Ideal for theatres, fashion shows, film sets, theme parks, live concerts, and many other applications, the Cameo Instant Air 3000 can be installed both on the ground and suspended from trusses. In combination with fog machines or haze machines, it creates particularly effective and dynamic stage effects that visually enhance any event.



CLIA3000


INSTANT AIR 3000

WIND MACHINE WITH VARIABLE FAN SPEED
AND WIND DIRECTION

SPECIFICATIONS

Product number:	CLIA3000
Product type:	Wind machine
Maximum airflow rate:	77 m³/min.
Air speed:	17 m/s
Fan speed:	440–3100 rpm
Fan diameter:	310 mm
DMX input:	3-pin XLR male 5-pin XLR male Connection for optional iDMX stick
DMX output:	3-pin XLR female 5-pin XLR female
DMX mode:	1-channel
DMX functions:	Fan control
Stand-alone functions:	Fan control
Control:	DMX512, remote control
Operating and display elements:	Full colour display with touchscreen
Operating voltage:	220 V–240 V AC / 50 Hz
Power consumption:	385 W
Stand-by power consumption:	7 W
Power supply connection:	Seetronic TR1 IN-OUT
Maximum output current:	11 A
Fuse:	T3,15 A / 250 V
Ambient temperature (in operation):	0°C–40°C
Relative air humidity:	< 85%, non-condensing
Housing material:	Metal
Housing colour:	Black
Dimensions (Ø × H, with stand):	385 × 515 mm
Weight:	11 kg incl. stand
Additional features:	Carrying handle, adjustable stand included, radio remote control included

TECHNICAL DRAWING

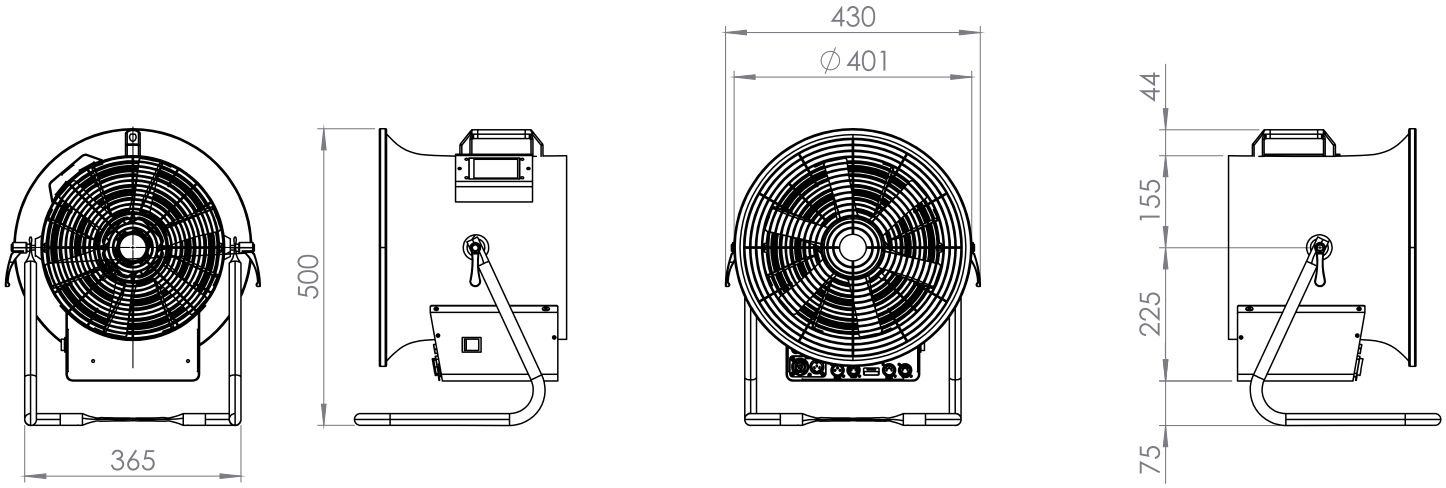

CLIA3000