



ICOA[®] PRO SUB 21 A FIRMWARE 1.0.5

POLARITY INVERT

LDICOA12APRO(W); LDICOA15APRO(W); LDICOASUB21APRO;

TABLE OF CONTENTS


1	ABOUT THE FIRMWARE UPDATE 1.0.5	4
2	INVERTING THE POLARITY ON THE DEVICE.....	5
3	INVERTING THE POLARITY VIA THE MOBILE APP	6
4	SUBWOOFER CONFIG SECTION UPDATE OVERVIEW	8
4.1	Main Coupling Section Update Overview	9

1 ABOUT THE FIRMWARE UPDATE 1.0.5


With the firmware update 1.0.5, your **ICOA® PRO Sub 21 A** has undergone several changes:

- Change in layout of the **Subwoofer Config** section of the mobile app
- Change in layout of the **Main Coupling** section of the mobile app
- Change in layout of the **SETTINGS** menu of the device
- Polarity invert function, both on the device and via the mobile app


2 INVERTING THE POLARITY ON THE DEVICE

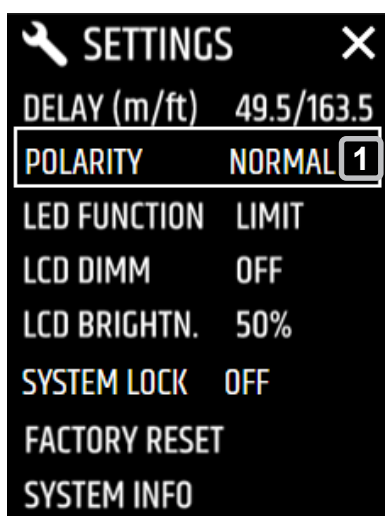

- 1 In the main screen, press and hold the **rotary-push encoder (RPE)** for 2 seconds to enter the **SETTINGS** menu.
- 2 In the **SETTINGS** menu, turn the **RPE** until **POLARITY NORMAL** **1** is highlighted.

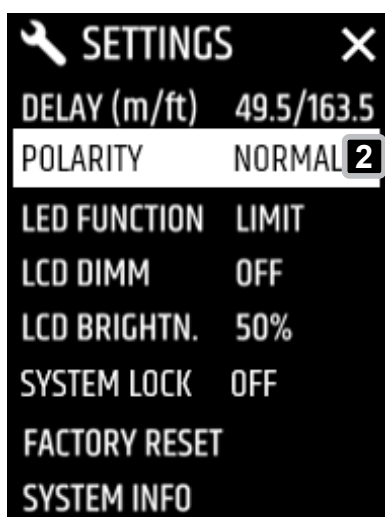


- 3 Press the **RPE** to select **POLARITY NORMAL** **2**.

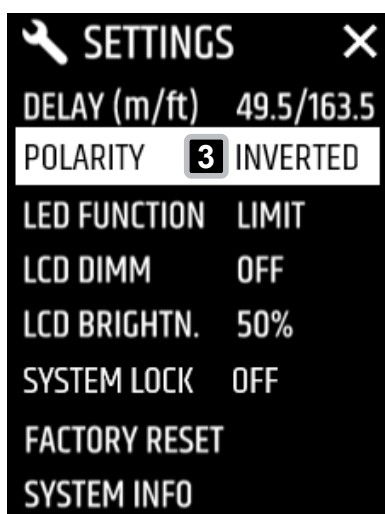


- 4 Turn the **RPE** to select **POLARITY INVERTED** **3**.
- 5 Press the **RPE** to confirm.


3 INVERTING THE POLARITY VIA THE MOBILE APP

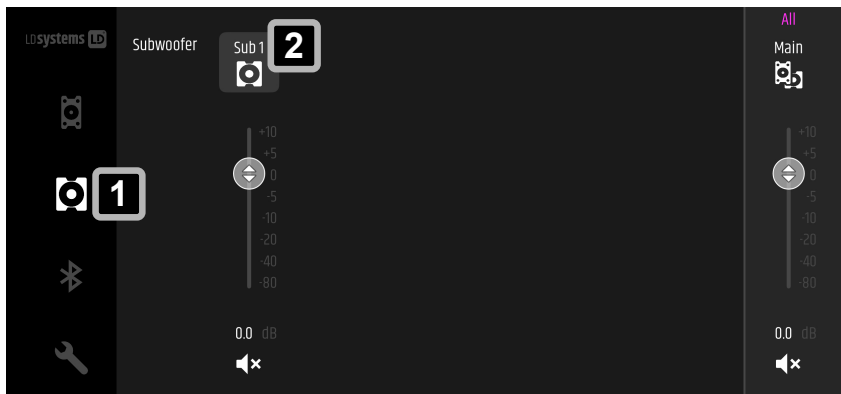


- 1 In the Sidebar, tap **1** to open the **Subwoofer** channels.
- 2 Tap on any available subwoofer **2** to open the **Subwoofer** channel EQ.

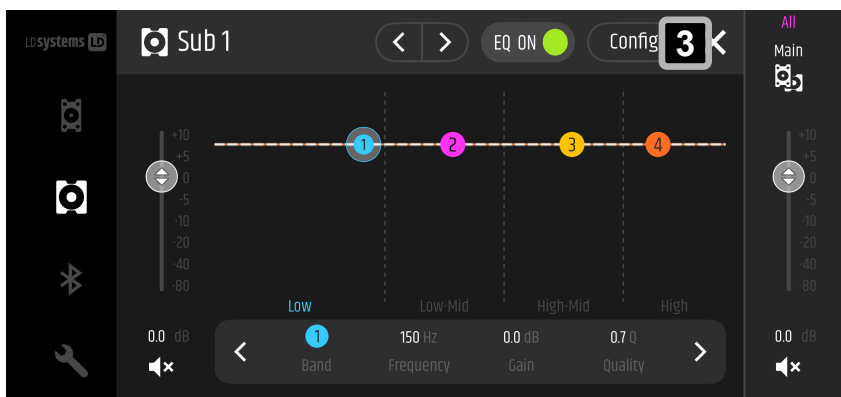

- 3 On the top right of the **Subwoofer** channel EQ, tap **Config** **3** to open the subwoofer **Config**.

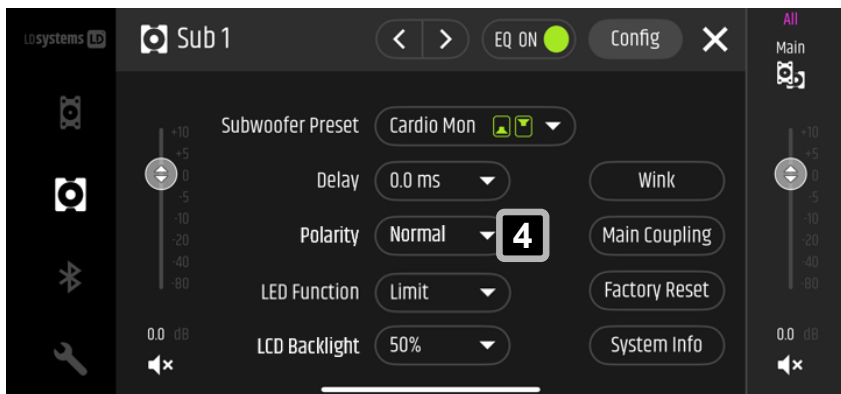

- 4 In the subwoofer **Config**, tap **4** in the **Polarity** drop-down menu.

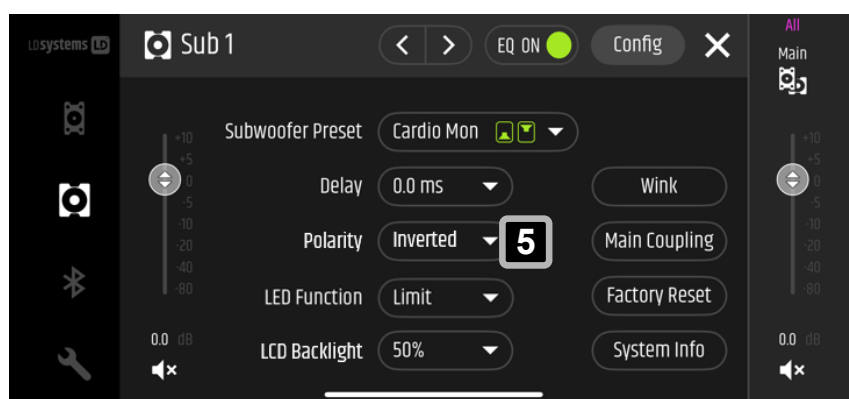


- 5 In the **Polarity** drop-down menu, choose **Inverted** **5**.

4 SUBWOOFER CONFIG SECTION UPDATE OVERVIEW




The menu items **LCD Dimm** and **LCD Brightness** have been combined in the **LCD Backlight** menu item.

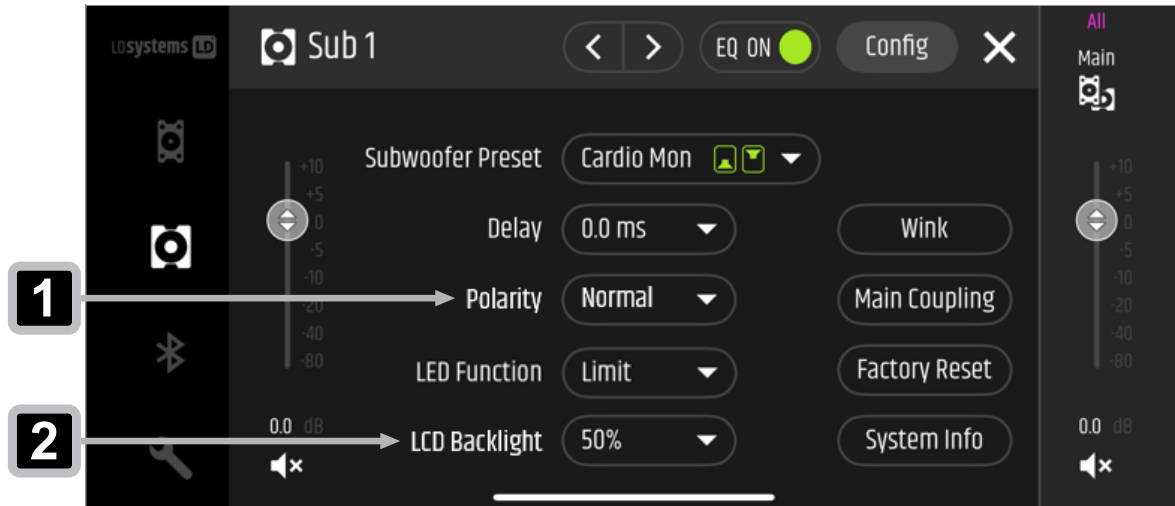

- 1** **Polarity** - Toggles the polarity (**Normal**, **Inverted**)
- 2** **LCD Backlight** - Opens the LCD brightness settings (**Brightness 0% ... 100%**, **Dimm On/Off**)

4.1 MAIN COUPLING SECTION UPDATE OVERVIEW

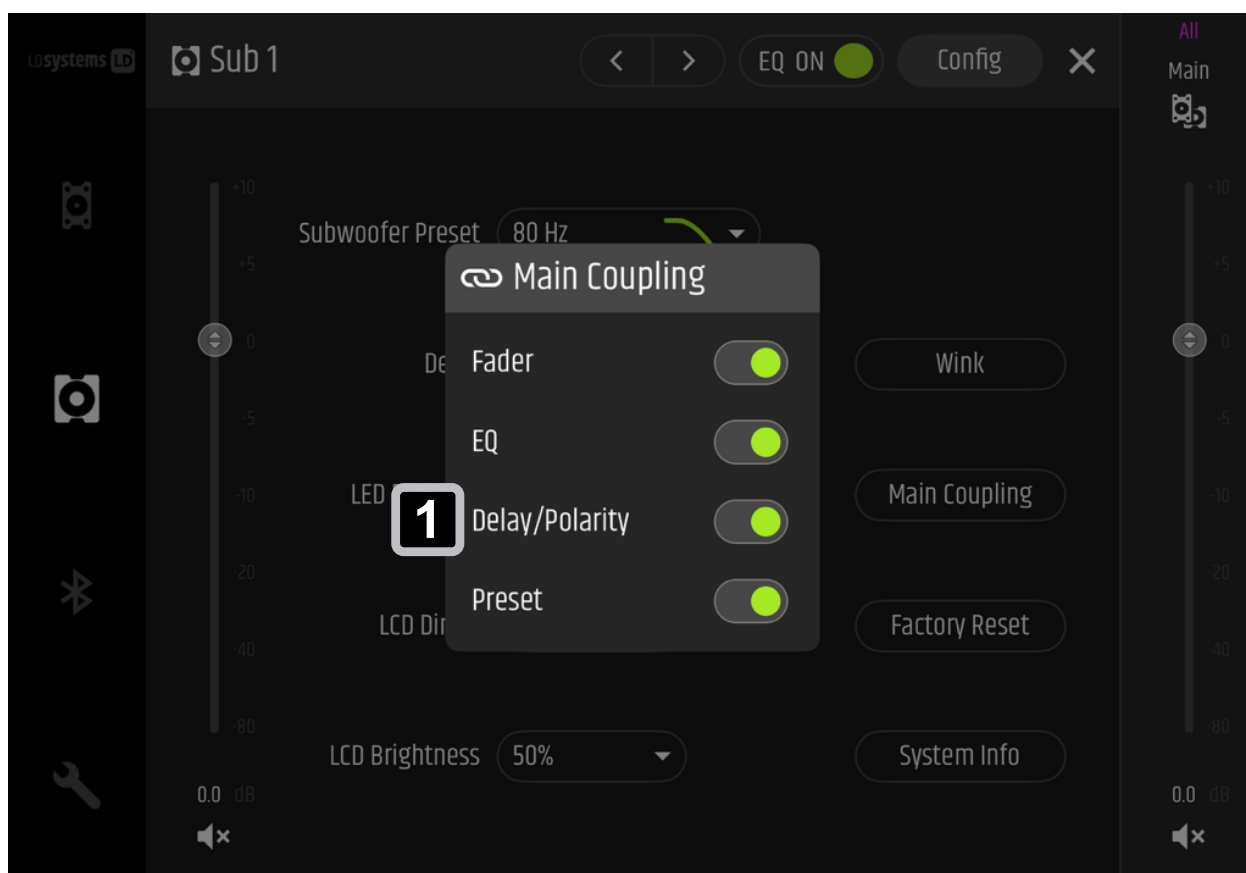

- 1** **Delay/Polarity** - Turns the signal delay and signal polarity on or off.

